

Sistem Cor-60 cu BT



Sistem Cor-60 cu BT

Coeficient transfer termic

Uw de la 1,0 (W/m²K)

Consultati tipologia, dimensiunea si sticla

Izolarea acustica

Spatiu maxim pentru vitrare: 45 mm.

Izolarea acustica maxima **Rw=48 dB**

Finisaje

Posibilitate bicolor

Culori vopsire (RAL, pestrit si texturat)

Vopsire imitatie lemn

Vopsire antibacteriana

Anodizat

Categorii realizate pe bancul de probe

Permeabilitate la aer
(EN 12207:2000): Clasa 4

Etanseitate la apa
(EN 12208:2000): Clasa E1200

Rezistenta la vant
(EN 12210:2000): Clasa C5
Test de referinta 1,20 x 1,16 m. 2 foi

Posibilitatea folosirii baghetelor cu estetica dreapta sau rotunjita.

Prezinta posibilitatea de a incorpora feronerie cu balamale ascunse.

Posibilitate de a incorpora feronerie de siguranta Evo Security.





Sectiuni

Toc 60 mm.
Foaie 68 mm.


Grosime profil

Fereastra 1,6 mm.
Usa 1,6 mm.

Lungime bara poliamida 24 mm.

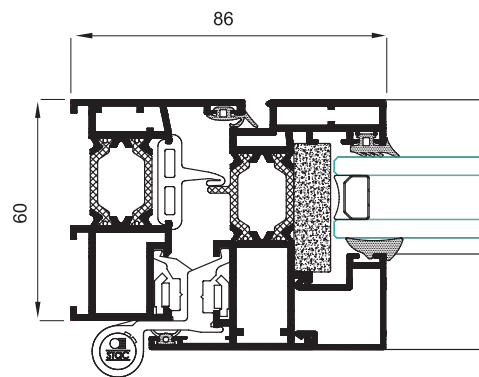

Posibilitati de deschidere

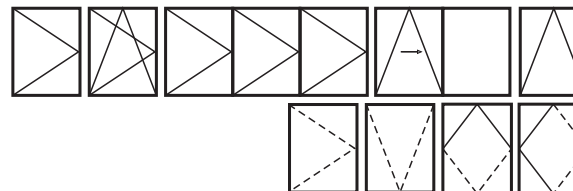

Deschidere interioara: batanta, oscilo-batanta, plianta, oscilo-paralela si oscilanta.

Deschidere exteriora: batanta, proiectanta-glisanta, pivotanta cu fixare pe orizontala si verticala.

Dimensiuni maxime/foaie

Latime(L) = 1.500 mm.

Inaltime (H) = 2.600 mm.

Consultati greutate si dimensiunile maxime conform tipologiei.

Greutate maxima/foaie

120 Kg.